

# CGL-70APT DC Motor Pumps







Diagram  
油路圖

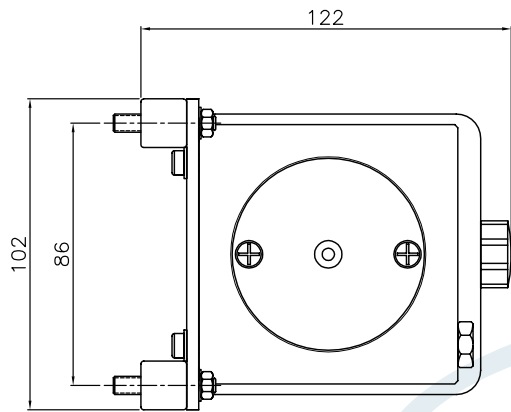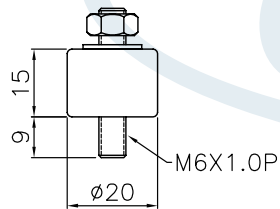


Shock Resistant  
避震橡腳

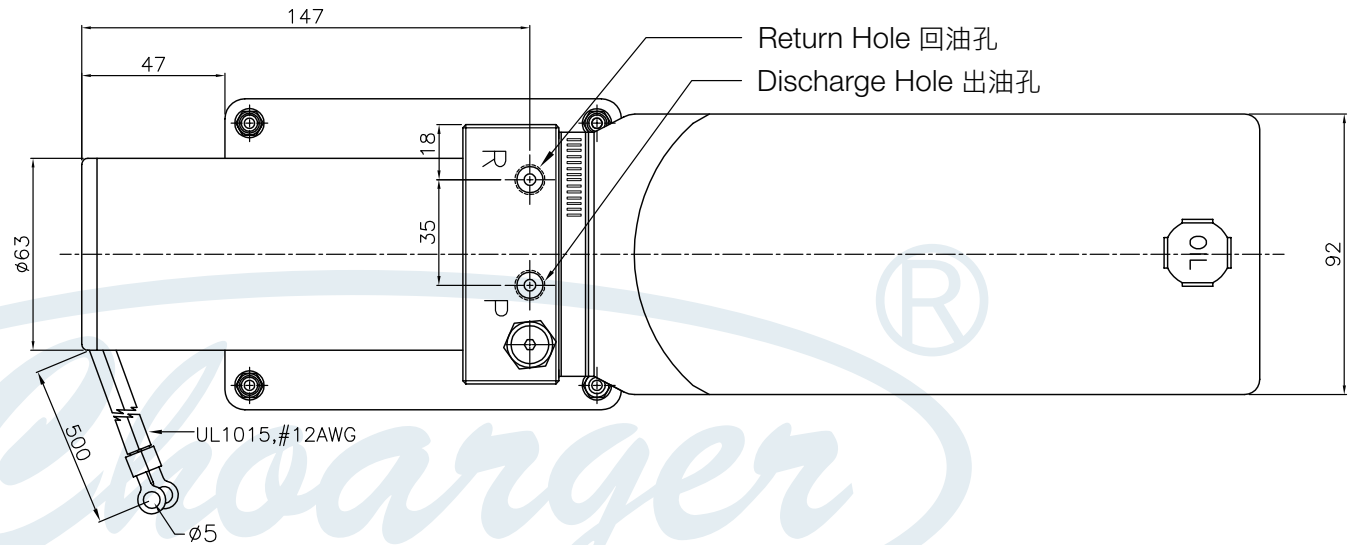

Relief Pressure Setting Screw  
壓力調節螺絲

Oil Feeding Port 注油孔

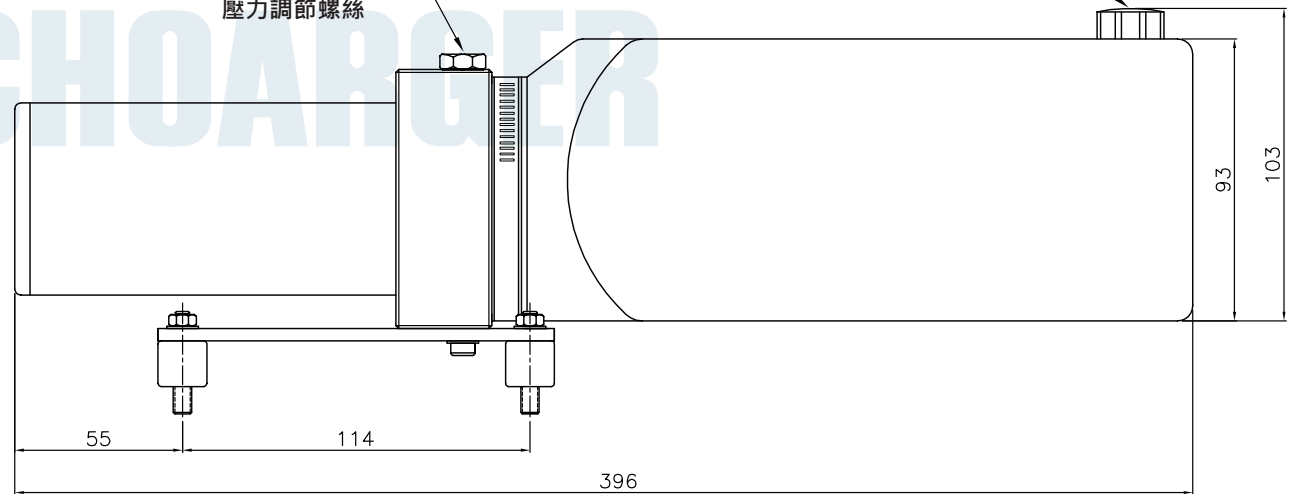

型號 Model	CGL-70APT
電壓 Voltage	DC24V
額定電流 AMP	7A
額定壓力 Max Operating Pressure	70 kgf/cm <sup>2</sup> (7MPa)
出油量/每分鐘 Discharge L/min	0.5 L/min
耐電壓 Damarg Voltage V/mA	2mA, 1 min 1.5kV
洩漏電流 Leak Current	500V, 1 min ≥ 60 MΩ
溫度保護 Temp. Protect	90°C
額定時間 Rating time	5 min
接管規格 Threaded connection	PT 1/8" ; M8 × 1
重量 Weight	2.8 kg
油箱容量 Tank Capacity	1.3 L